



TYPE EVSL-30

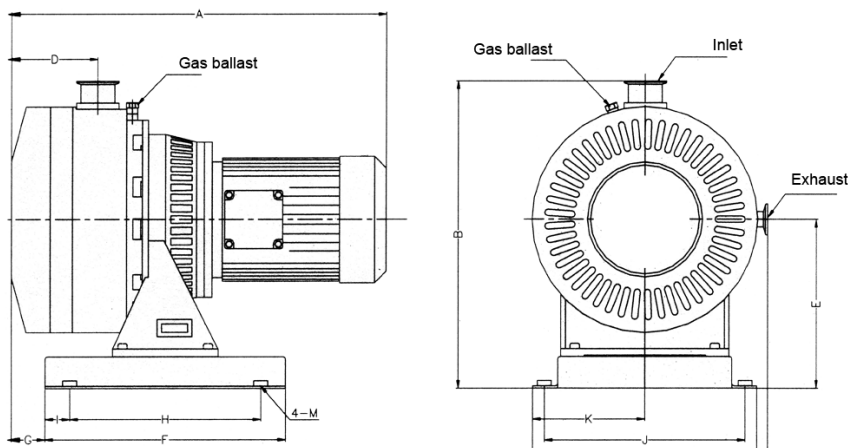

Pumping speed curve

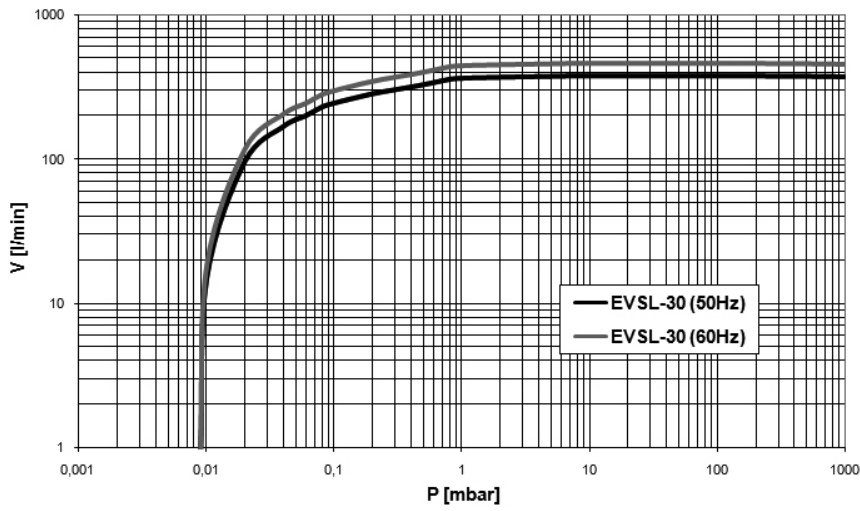

Dimensions	A	B	C	D	E	F	G	H	I	J	K	L	M
EVSL-30	482	395	302	111	217	310	43	246	32	258	144	288	M10

TYPE EVSL-30

Technical Data		TYPE EVSL-30	
		50 Hz	60 Hz
Pumping speed	m ³ /h	29	35
Ultimate pressure max.	mbar	9·10 ⁻³	9·10 ⁻³
Leak rate	mbar·l/s	< 10 ⁻⁴	< 10 ⁻⁴
Max. inlet pressure	mbar	atmosphere	atmosphere
Motor power	kW	0,75	0,75
Nominal speed	rpm	2850	3450
Noise level	dB(A)	≤ 68	≤ 68
Weight	kg	48	48
Admissible ambient temp.	°C	5 to 40	5 to 40
Connection	Inlet	DIN 40 KF	40 KF
	Outlet	DIN 25 KF	25 KF

Ordering Information	TYPE EVSL-30	
	50 Hz	60 Hz
Single phase motor 230V, 50Hz (IEC) 230V, 60Hz (IEC) 230V, 60Hz (NEMA)	633.001	633.002 633.003
Three phase motor 400V, 50Hz (IEC) 400V, 60Hz (IEC) 400V, 60Hz (NEMA)	633.011	633.012 633.013
Other Voltages/Frequencies	Upon request	
Exhaust damper	633.100	
Minor kit (8000 hours)	633.801	
Major kit (16000 hours)	633.802	